



# U Profil STS-U3

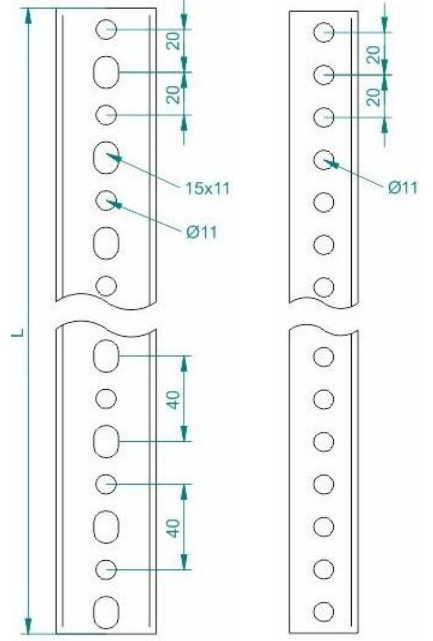

• Ölçüler mm. dir. - Dimensions in mm.



■ STS-U1  
W : 40 mm  
L : 110 mm



■ STS-U1D  
W : 40 mm  
L : 110 mm



■ STS-S1  
w : 48 mm  
L : 120 mm



■ STS-USK  
W : 100mm ile 600mm  
T : 1,5mm to 2,0mm

Sıcak Daldırma Galvaniz - Hot Dip Galvanized

Pregalvaniz - Pregalvanized

Ürün Kodu Product Code	W mm	L mm	 Kg ad/pce.	 Kg ad/pce.
STS U3-25	45	250	0,363	0,381
STS U3-50	45	500	0,726	0,763
STS U3-75	45	750	1,089	1,144
STS U3-100	45	1000	1,452	1,525
STS U3-125	45	1250	1,816	1,906
STS U3-150	45	1500	2,179	2,288
STS U3-175	45	1750	2,542	2,669
STS U3-200	45	2000	2,905	3,050
STS U3-225	45	2250	3,268	3,431
STS U3-250	45	2500	3,631	3,813
STS U3-300	45	3000	4,357	4,575

## Yüzey Koruma

Sıcak Daldırma Galvaniz TS 914  
Pre-galvaniz TS 822  
Elektrostatik Toz Boya

## Surface Protection

Hot Dip Galv. ISO EN 1461  
Pre-galvanization ISO EN 10143  
Electrostatic Sprey Painting