



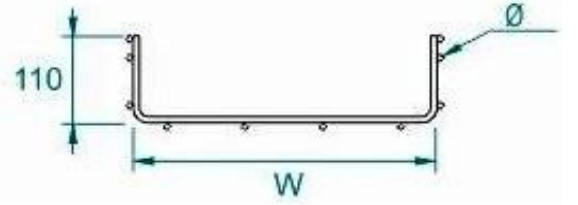


# H110 Tel Örgü Kablo Kanalları

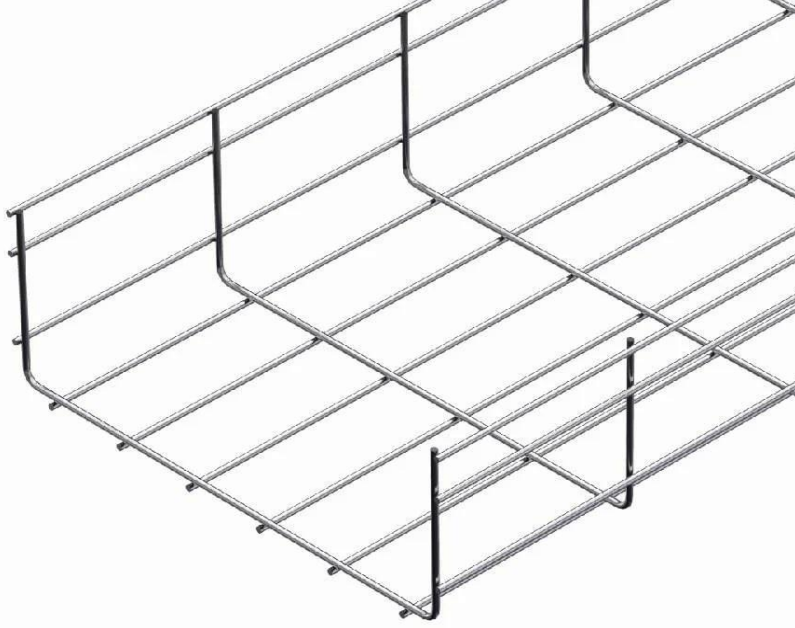

 Sıcak Daldırma Galvaniz - Hot Dip Galvanized

 Pregalvaniz - Pregalvanized

Ürün Kodu Product Code	W mm	Ø mm	 Kg m	 Kg m
STS-TK10-11040	100	4,0	1,050	1,166
STS-TK15-11040	150	4,0	1,118	1,241
STS-TK20-11040	200	4,0	1,331	1,477
STS-TK25-11040	250	4,0	1,474	1,636
STS-TK30-11040	300	4,0	1,616	1,794
STS-TK40-11040	400	4,0	1,901	2,110
STS-TK50-11040	500	4,0	2,187	2,428
STS-TK60-11040	600	4,0	2,472	2,744
STS-TK10-11050	100	5,0	1,890	2,098
STS-TK15-11050	150	5,0	2,012	2,233
STS-TK20-11050	200	5,0	2,396	2,660
STS-TK25-11050	250	5,0	2,653	2,945
STS-TK30-11050	300	5,0	2,786	3,092
STS-TK40-11050	400	5,0	2,922	3,243
STS-TK50-11050	500	5,0	3,359	3,728
STS-TK60-11050	600	5,0	3,796	4,214

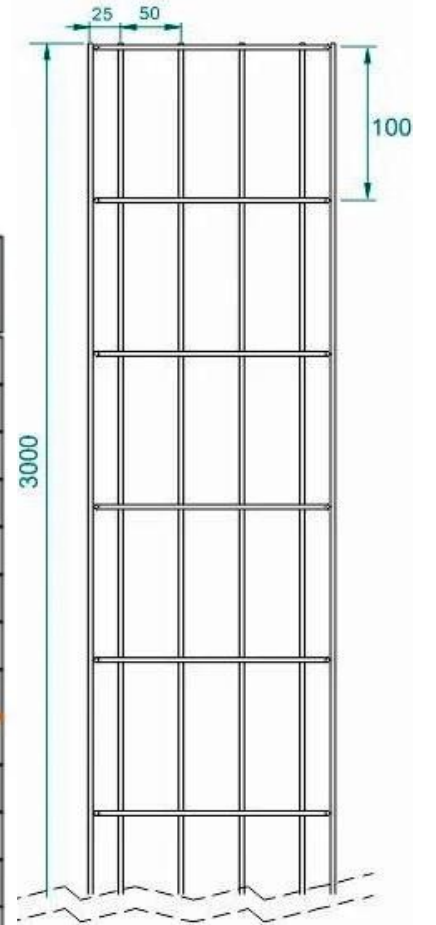

**Standart Uzunluk 3000 mm.**

## Yüzey Koruma

Sıcak Daldırma Galvaniz TS 914  
Pre-galvaniz TS 822  
Elektrostatik Toz Boya

**Standard Length is 3000 mm.**

## Surface Protection

Hot Dip Galv. ISO EN 1461  
Pre-galvanization ISO EN 10143  
Electrostatic Sprey Painting