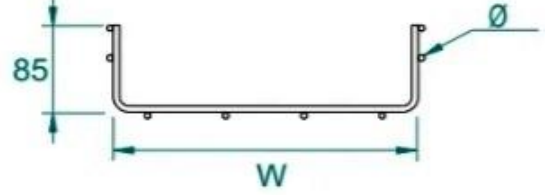
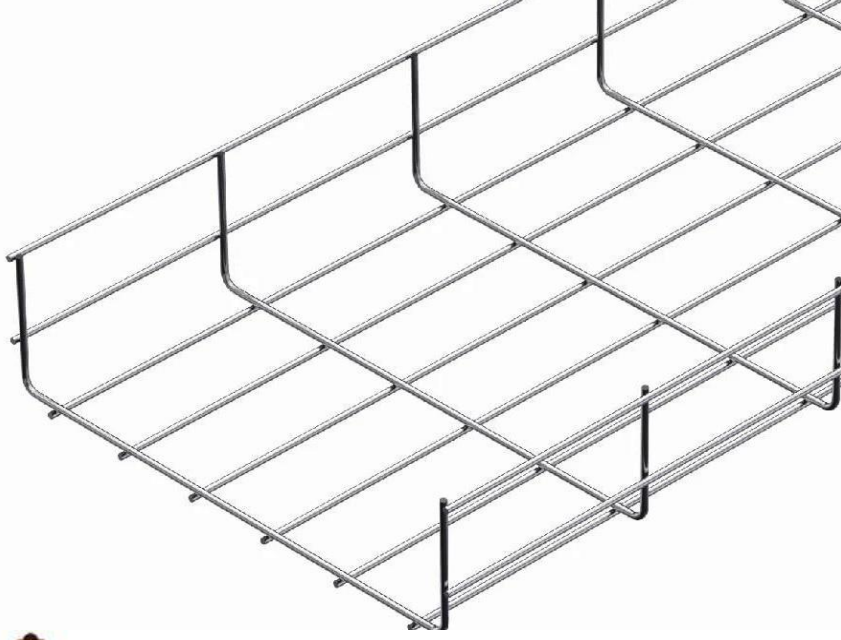





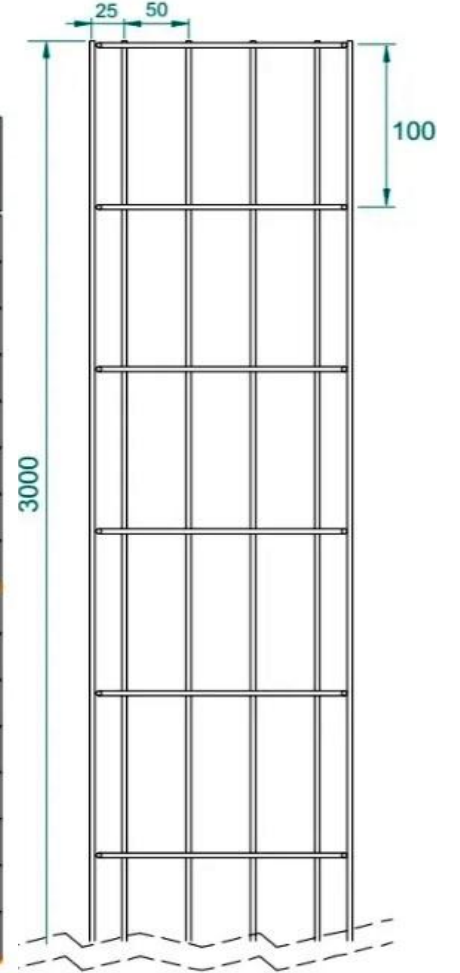
# H85 Tel Örgü Kablo Kanalları



 Sıcak Daldırma Galvaniz - Hot Dip Galvanized

 Pregalvaniz - Pregalvanized

| Ürün Kodu<br>Product Code | W<br>mm | Ø<br>mm |  Kg<br>m |  Kg<br>m |
|---------------------------|---------|---------|---|---|
| STS-TK10-8540             | 100     | 4,0     | 0,808   | 0,897   |
| STS-TK15-8540             | 150     | 4,0     | 0,951   | 1,056   |
| STS-TK20-8540             | 200     | 4,0     | 1,093   | 1,213   |
| STS-TK25-8540             | 250     | 4,0     | 1,236   | 1,372   |
| STS-TK30-8540             | 300     | 4,0     | 1,378   | 1,530   |
| STS-TK40-8540             | 400     | 4,0     | 1,664   | 1,847   |
| STS-TK50-8540             | 500     | 4,0     | 1,949   | 2,163   |
| STS-TK60-8540             | 600     | 4,0     | 2,234   | 2,480   |
| STS-TK10-8550             | 100     | 5,0     | 1,483   | 1,646   |
| STS-TK15-8550             | 150     | 5,0     | 1,746   | 1,938   |
| STS-TK20-8550             | 200     | 5,0     | 2,007   | 2,228   |
| STS-TK25-8550             | 250     | 5,0     | 2,269   | 2,519   |
| STS-TK30-8550             | 300     | 5,0     | 2,317   | 2,572   |
| STS-TK40-8550             | 400     | 5,0     | 2,554   | 2,835   |
| STS-TK50-8550             | 500     | 5,0     | 2,991   | 3,320   |
| STS-TK60-8550             | 600     | 5,0     | 3,428   | 3,805   |



**Standart Uzunluk 3000 mm.**

## Yüzey Koruma

Sıcak Daldırma Galvaniz TS 914  
Pre-galvaniz TS 822  
Elektrostatik Toz Boya

**Standard Length is 3000 mm.**

## Surface Protection

Hot Dip Galv. ISO EN 1461  
Pre-galvanization ISO EN 10143  
Electrostatic Spray Painting