



H35 Tel Örgü Kablo Kanalları

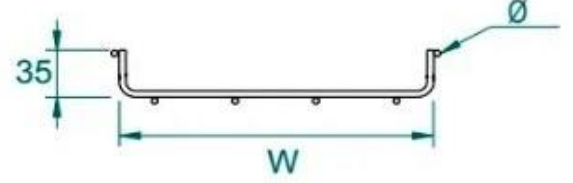


Sıcak Daldırma Galvaniz - Hot Dip Galvanized

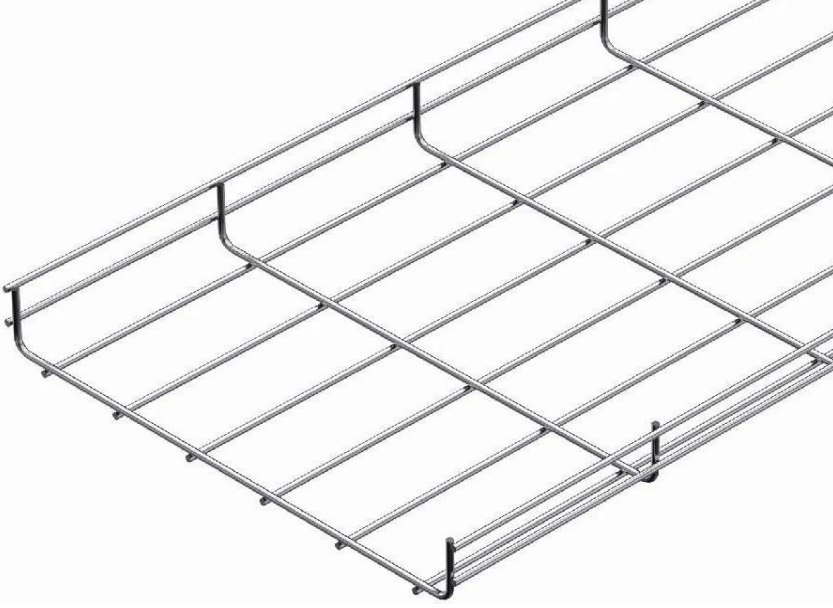

Pregalvaniz - Pregalvanized

Ürün Kodu Product Code	W mm	Ø mm	Kg m	Kg m
STS-TK10-3540	100	4,0	0,523	0,581
STS-TK15-3540	150	4,0	0,665	0,738
STS-TK20-3540	200	4,0	0,808	0,897
STS-TK25-3540	250	4,0	0,951	1,056
STS-TK30-3540	300	4,0	1,093	1,213
STS-TK40-3540	400	4,0	1,378	1,530
STS-TK50-3540	500	4,0	1,664	1,847
STS-TK60-3540	600	4,0	1,949	2,163
STS-TK10-3550	100	5,0	0,941	1,045
STS-TK15-3550	150	5,0	1,197	1,329
STS-TK20-3550	200	5,0	1,454	1,614
STS-TK25-3550	250	5,0	1,712	1,900
STS-TK30-3550	300	5,0	1,967	2,183
STS-TK40-3550	400	5,0	2,480	2,753
STS-TK50-3550	500	5,0	2,995	3,324
STS-TK60-3550	600	5,0	3,508	3,894

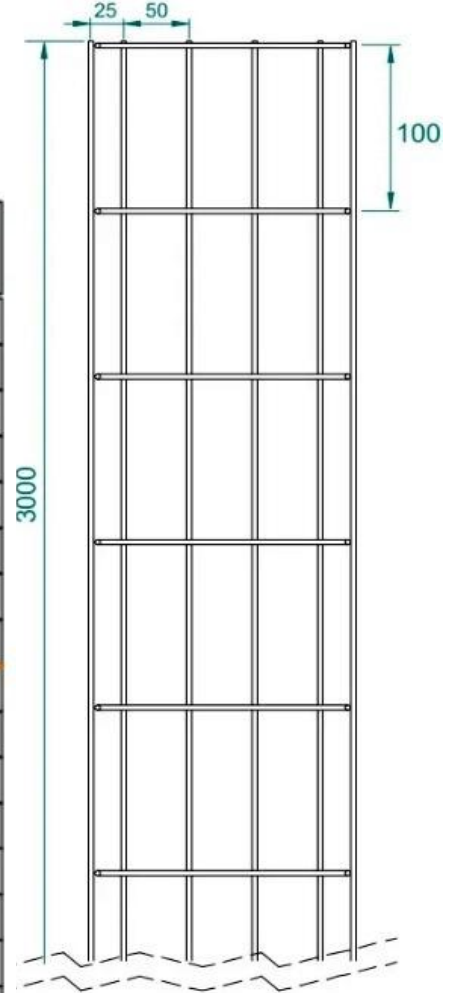

Standart Uzunluk 3000 mm.

Yüzey Koruma

Sıcak Daldırma Galvaniz TS 914
Pre-galvaniz TS 822
Elektrostatik Toz Boya

Standard Length is 3000 mm.

Surface Protection

Hot Dip Galv. ISO EN 1461
Pre-galvanization ISO EN 10143
Electrostatic Sprey Painting